

# Divine

EST 1994

# WATER

## EZYTAP

### Hot Tap

Instant boiling plus ambient/or chilled water

Sleek and  
modern lines

Fit for the  
modern office



### Features

Stylish chrome tap with electronic touch panel faucet with hot water safety button.

The EZYTAP boiler and chiller are discreetly housed in the cabinet base unit underneath the tap.



CE RoHS

refreshingly different



# Instant boiling plus ambient or chilled water with unique scale protection

## Specifications and performance

Model	Hourly output			Dimensions (mm)	Temp
	Hot	Ambient	Chilled		
EZYTAP75	14ltr	indefinite	n/a	329h, 220w,	max
EZYTAP7800	14ltr	n/a	8ltr	Boiler 329h, 220w, 352d Chiller 265h, 200w, 380d	max 6 – 10C

**EZYTAP75**

**EZYTAP7800**

## Description

### Tap

- Chrome faucet with electronic controls
- Touch control dispensing taps
- Flashing indicator light when heating
- Hot water safety tap
- Dispensing height of 200mm.



### Under sink systems

- The EZYTAP75 provides hot and ambient water. Connecting our UC800 under sink chiller creates the EZYTAP7800, which provides hot and chilled water
- The EZYTAP atmospheric boiler includes a powerful 2kW SUS316 ring type heating element with a large heating area and fast heat conduction
- The UC800 is a compressor cooler with a static fan assisted condenser
- It is recommended that the under sink base unit allows 100mm ventilation space around the EZYTAP75/EZYTAP7800.

### Scale protection

- The two separate mains water inlets allow for the installation of a scale removal filter on the boiler inlet and a much more cost-effective taste, odour and turbidity carbon block filter on the ambient/chilled side
- Scale removal filters are expensive and since their effective 'life' is measured in litres of water passing through it, it is important to use it only on the boiler side
- Soft water areas only require a single carbon filter connected to a combined boiler and ambient/chilled inlet
- The EZYTAP boiler can be opened for descaling and servicing.




### Venting

- An expansion chamber absorbs the steam/water pressure created during boiling and reduces the risk of drips of water or steam from the tap. It is nevertheless recommended to mount the EZYTAP over a sink or drip tray.

## EZYTAP installation diagrams


### EZYTAP7800 in soft water area

Single carbon block filter for the boiler and the chiller side

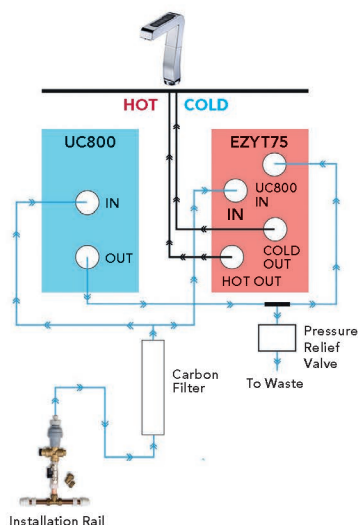


### EZYTAP7800 in hard water area

Scale removal filter for the boiler and a carbon block for the chiller side

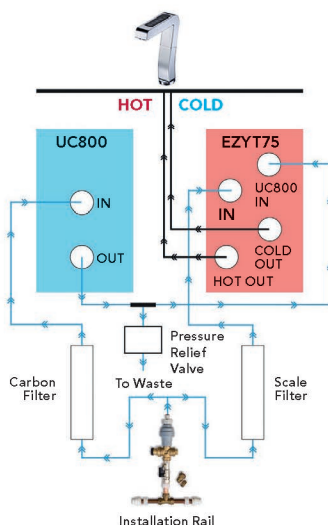

### EZYTAP75 in hard water area

Scale removal filter for the boiler and a carbon block for the ambient side

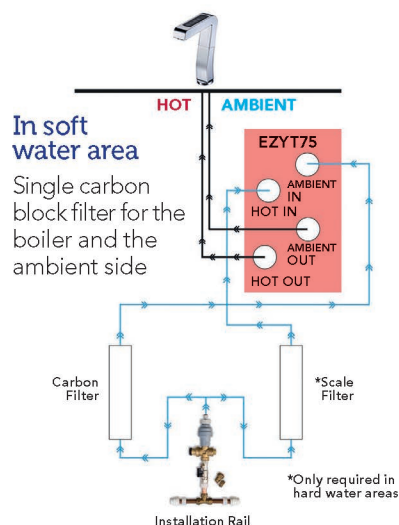

Divine  
WATER

EST 1994